

# CAMERA SYSTEMS 2021/22

Trucks & Vans



**For trucks,  
Transporter,  
Municipal and  
Special vehicles**



All products can  
also be found on the net  
[www.roscho.de](http://www.roscho.de)

**ROSCHO**  
Automotive Solutions

# CONTENT

## Camera systems 04

- Special
- 5" Systems
- 7" Systems
- 7" Quad systems
- Solo & Carriage
- TurnCAM

## Monitors 12

- 5", 7" and 10" Monitors

## Cameras 14

- Bracket cameras
- Built-in cameras
- Shutter cameras
- Ball cameras

## Cable & adapter 20

- Accessories
- Spiral cable set
- Customized adapter



# 04

Camera systems


# 08

Solo & carriage



# 11

TurnCAM®

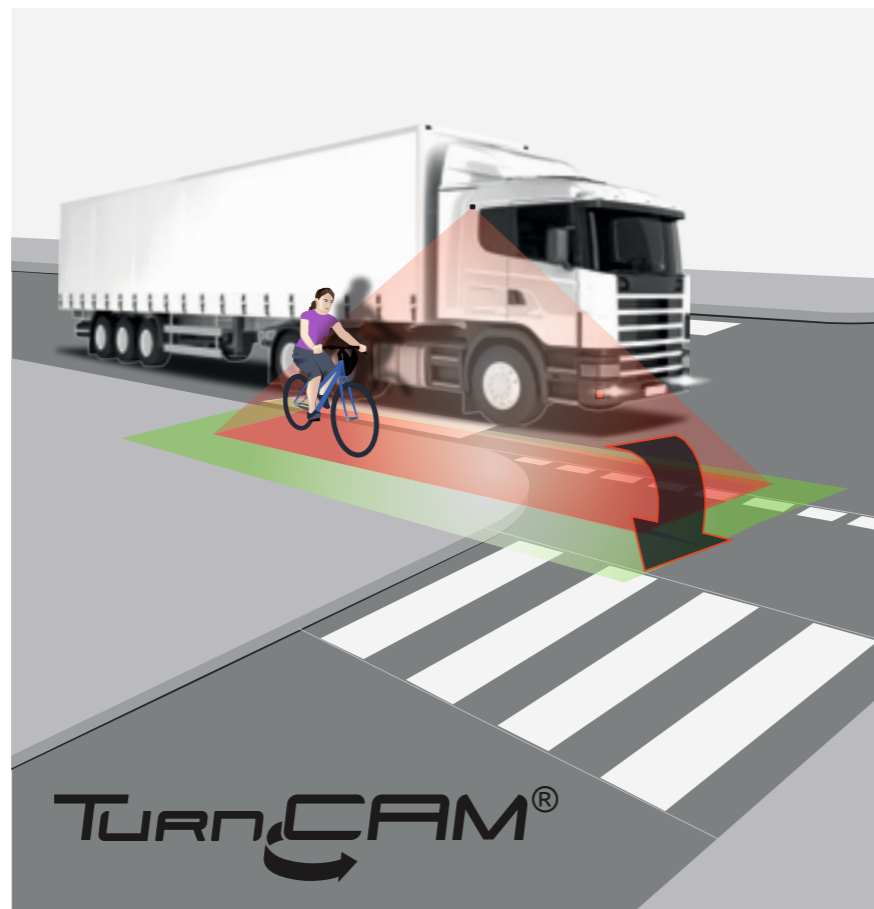

TURNCAM®

# 12

Monitors



# 14

Cameras

# 20

Cable & adapter



# 24

Customized adapter



## ROSHO Product solutions

Whether land, construction, transport vehicles or buses: ROSHO offers camera, video and multimedia solutions that are perfectly tailored to the various application scenarios in the vehicle. We cover all leading manufacturers with their common vehicle types.

The vehicles you use or offer are not included? No problem!

We also find excellent solutions for less common brands, vehicle types or scenarios. In case of doubt at your location. This is our promise.

We want it to be as easy as possible for you to equip your vehicles with powerful, innovative camera technology. For the protection of health and property, for the benefit of your and our customers.

You have the challenge. We have the solution. ROSHO





Critical workflows can be checked with ROSHO systems more efficient



# CAMERA SYSTEMS

Free view on all sides

## Camera systems 5" System



### Camera system RS 50-3

SCM-1-001-53

5"-LCD-Monitor LCM 503T, camera RK 1405M and 20 m camera cable

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 3 x Camera in

## Camera systems Special



### Camera system RS 73-8

SCM-1-001-50

7"-LCD-Monitor LCM 703T, camera RKT 1003M and 20 m camera cable

Camera: Protection class IP 69K // Viewing angle 110°  
Monitor: 3 x Camera in



# 06 Camera systems

## 7" and 10" systems

### Camera system RS 73-18

SCM-1-001-51

7"-LCD-Monitor LCM 703T, camera RK 1100M and 20 m camera cable

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in



### Camera system RS 73-4

SCM-1-001-44

7"-LCD-Monitor LCM 703T, camera RK 1405M and 20 m camera cable

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 3 × Camera in

### Camera system RS 100-2

SCM-1-001-66

10"-LCD-Monitor LCM 1003T, camera RK 1405M and 20 m camera cable

Camera: Protection class IP 69K // Viewing angle 130°/150°  
Monitor: 3 × Camera in



# Camera systems 07

## 7" and 10" Quad systems

### Camera system RS 70-2

SCM-1-001-52

7"-LCD-Quad-Monitor LCM 703QHD, camera RK 1405M and 20 m camera cable

### Camera system RS 70-14

SCM-1-001-43

7"-LCD-Quad-Monitor LCM 703QHD, 2 × camera RK 1405M and 2 × 20 m camera cable

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 4 × Camera in



### Camera system RS 100-11

SCM-1-001-101

10"-LCD-Quad-Monitor LCM 1003QHD, camera RK 1405M and 20 m camera cable

### Camera system RS 100-10

SCM-1-001-100

10"-LCD-Quad-Monitor LCM 1003QHD, 2 × camera RK 1405M and 2 × 20 m camera cable

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 4 × Camera in



**More safety  
with ROSHO  
Systems**







## Camera system RS 73-4

SCM-1-001-44

7"-LCD-Monitor LCM 703T, 20 m camera cable and camera RK 1405M.

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 3 × Camera in



## Camera system RS 73-45

SCM-1-001-62

7"-LCD-Monitor LCM 703T, trailer detection box, 2 × 20 m camera cable, ABS Towing vehicle VAR II-1.5 m and camera RK 1405M.

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in



## Camera system RS 73-46

SCM-1-001-63

7"-LCD-Monitor LCM 703T, trailer detection box, 2 × 20 m camera cable, 2 × camera RK 1405M, 20 m extension cable and ABS spiral cable set VAR II-1.5 m.

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 3 × Camera in




## Camera system RS 73-47

SCM-1-001-64

7"-LCD-Monitor LCM 703T, 10 m camera cable, ABS spiral cable set ADR VAR II-1.5 m, 20 m extension cable and camera RK 1405M.

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 3 × Camera in

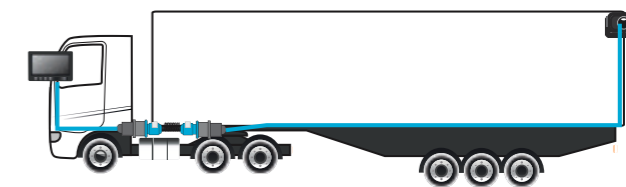



# 10 Camera systems Solo & Carriage

## Camera system RS 73-18

SCM-1-001-51

7"-LCD-Monitor LCM 703T, 20 m camera cable and camera RK 1100M.

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in



## Camera system RS 73-20

SCM-1-001-55

7"-LCD-Monitor LCM 703T, trailer detection box, 2 × 20 m camera cable, camera RK 1100M and ABS Towing vehicle VAR II-1.5 m.

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in



## Camera system RS 73-21

SCM-1-001-54

7"-LCD-Monitor LCM 703T, trailer detection box, 2 × 20 m camera cable, ABS spiral cable set VAR II-1.5 m, 2 × camera RK 1100M and 20 m extension cord.

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in




## Camera system RS 73-22

SCM-1-001-59

7"-LCD-Monitor LCM 703T, 10 m camera cable, ABS spiral cable set ADR VAR II-1.5 m, 20 m extension cord and camera RK 1100M.

Camera: Protection class IP 69K // Viewing angle 120°  
Monitor: 3 × Camera in

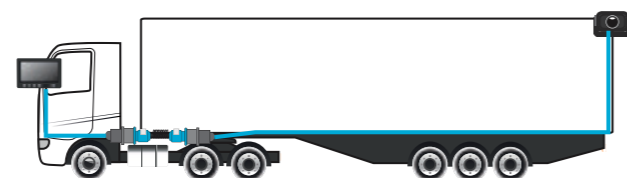

# Camera systems Solo & Carriage 11





## MAN MMT III Display

### Cameraset MMT III -1

SC-1-001-01

Adapter, camera cable 20m and camera RK 1405 M

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 3 × Camera in



### Cameraset MMT III -2

SC-1-001-02

Adapter, trailer detection box, 2x camera cable 20m, ABS Towing vehicle VAR II-1.5m and camera RK 1405 M

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in



### Cameraset MMT III -3

SC-1-001-03

Adapter, trailer detection box, 2x camera cable 20m, ABS spiral cable set VAR II-1.5m, extension cord 20m and 2x camera RK 1405 M

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 3 × Camera in




### Cameraset MMT III -4

SC-1-001-04

Adapter, camera cable 10m, spiral cable set VAR II-1.5m, extension cord 20m and camera RK 1405 M

Camera: Protection class IP 69K // Viewing angle 130°  
Monitor: 3 × Camera in

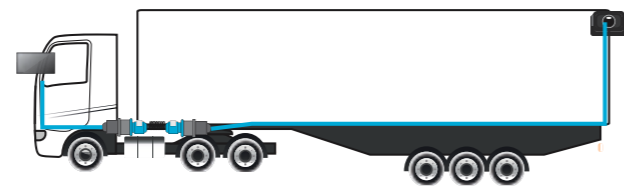

## MB J9P-Display

### Cameraset J9P-1

SC-1-001-10

Adapter, camera cable 20m and camera RK 1405 M VGA

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in



### Cameraset J9P -2

SC-1-001-11

Adapter, 2x camera cable 20m, ABS Towing vehicle VAR II-1.5m and camera RK 1405 M VGA

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in



### Cameraset J9P -3

SC-1-001-12

Adapter, 2x camera cable 20m, ABS spiral cable set VAR II-1.5m, extension cord 20m and 2x camera RK 1405 M VGA

Camera: Protection class IP 69K // Viewing angle 145°  
Monitor: 3 × Camera in




### Cameraset J9P -4


SC-1-001-13

Adapter, camera cable 10m, spiral cable set VAR II-1.5m, extension cord 20m and camera RK 1405 M VGA

Camera: Protection class IP 69K // Viewing angle 120°  
Monitor: 3 × Camera in

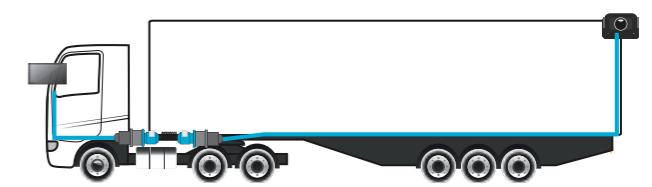



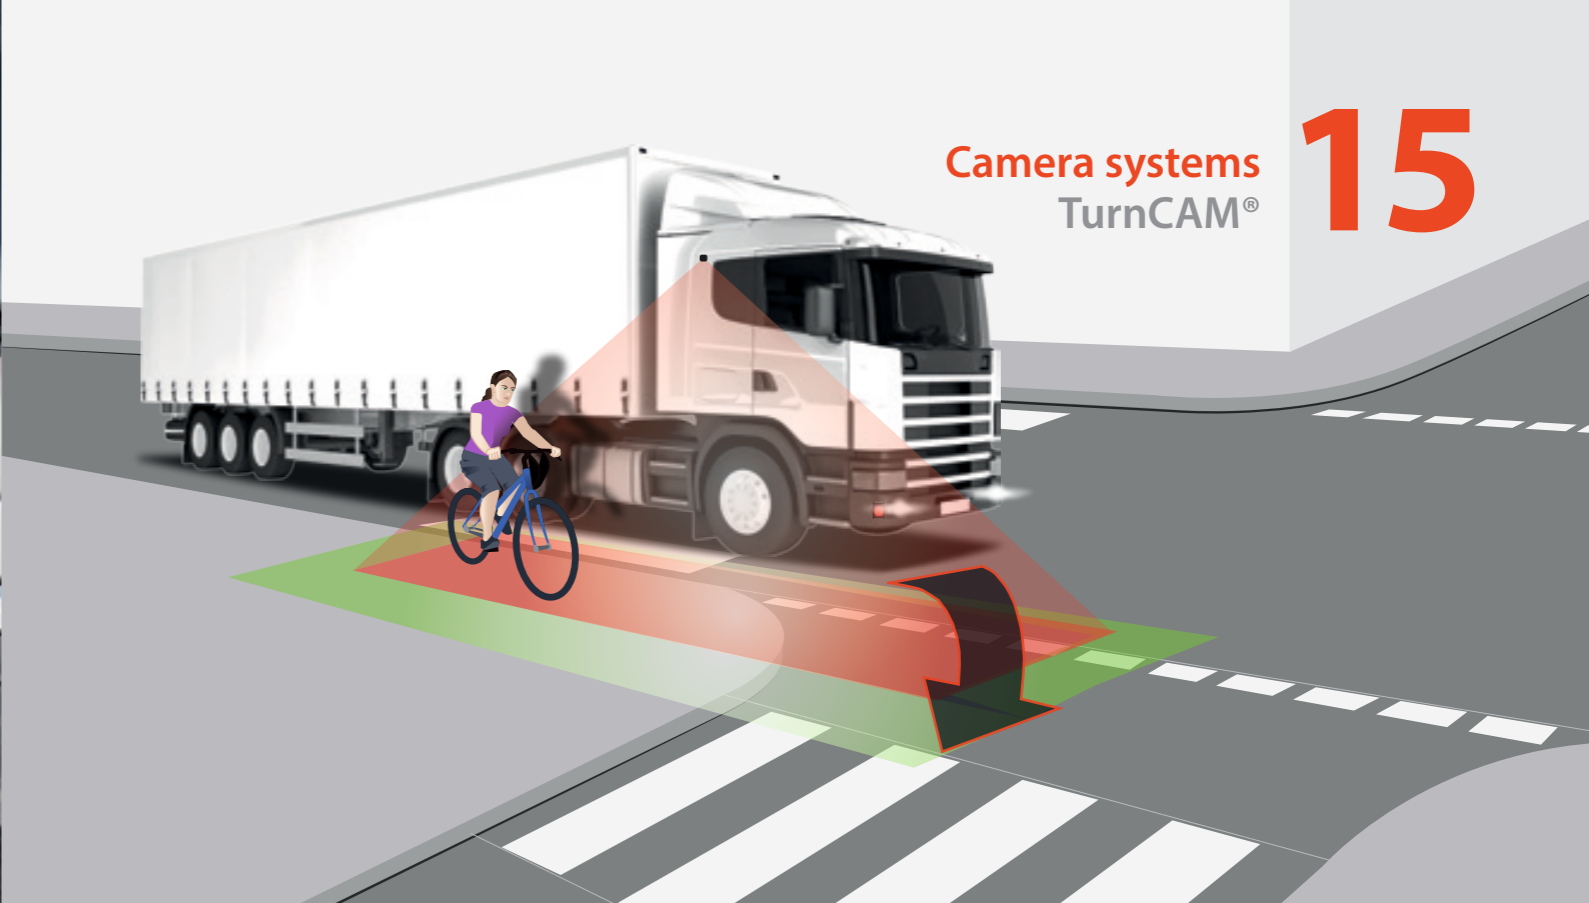

# TURNCAM®

## Active turning assistance system

The TurnCAM® recognizes endangered people in the blind spot. The driver receives a visual and acoustic warning. All TurnCAM® systems have one general operating permit and are thus acc. BMVI guideline eligible.

## TurnCAM® System variants

- TurnCAM® System variant 01/A  
SCM-1-001-80
- TurnCAM® System variant 01/B  
SCM-1-001-81
- TurnCAM® System variant 01/F  
SCM-1-001-90
- TurnCAM® System variant 01/G  
SCM-1-001-91

## TurnCAM® Accessories

- Calibration box  
ZA-4-900-47
  - TurnCAM® GPS Module  
ZA-7-900-108
  - Turn signal set  
SZ-1-002-02
- Further accessories on request.



Monitor  
LCM 1003T /  
LCM 1003QHD  
LCM 703T /  
LCM 703QHD

Camera  
SK 1708M

TurnCAM®  
Blind Spot  
Detection Box



## MONITORS

High resolution 5", 7", 10"



### Monitor LCM 503T

MM-3-050-02

5" Monitor // 3 × Camera in // Protection class IP 68

#### Technical specifications

Resolution	640 × 480
Brightness	250 cd/m <sup>2</sup>
Operating voltage	10 - 32V
Temperature range	-20 °C ~ +70 °C
Connections	3 × MiniDIN
Dimensions (W × H × D)	105 × 152 × 23 mm

Monitors  
5", 7" and 10"



### Monitor LCM 703T

MM-3-070-01

7" Monitor // 3 × Camera in // Protection class IP 64

#### Technical specifications

Resolution	800 × 480
Brightness	450 cd/m <sup>2</sup>
Operating voltage	10 - 32V
Temperature range	-20 °C ~ +70 °C
Connections	3 × MiniDIN
Dimensions (W × H × D)	181 × 122 × 24 mm



### Adapter

ZA-2-900-10



### Monitor LCM 1003T

MM-3-100-01

10" Monitor // 3 × Camera in // Protection class IP 64

#### Technical specifications

Resolution	1280 × 800
Brightness	450 cd/m <sup>2</sup>
Operating voltage	12 - 24VDC
Temperature range	-20 °C ~ +75 °C
Connections	3 × MiniDIN
Dimensions (W × H × D)	252 × 172,5 × 29,5 mm

### Monitor LCM 1003QHD

MM-4-100-01

10" Monitor // 4 × Camera in // Protection class IP 64

#### Technical specifications

Resolution	1280 × 800
Brightness	450 cd/m <sup>2</sup>
Operating voltage	12 - 24VDC
Temperature range	-20 °C ~ +75 °C
Connections	4 × MiniDIN
Dimensions (W × H × D)	252 × 172,5 × 29,5 mm



Possible representations






## Cameras Bracket cameras



12 - 24V

### Magnetic base for the RK 14xx Series

Without Camera  
ZA-1-002-09



12 - 24V



### Camera RK 14xx Serie

Camera RK 1404M (78°)	CM-1-070-06
Camera RK 1405M (130°)	CM-1-130-10
Camera RK 1415M (150°)	CM-1-150-05
Camera RK 1415M (150°) NTSC	CM-1-150-06
Camera RK 1405M (130°) VGA	CM-1-130-20

12 and 24V reversing camera with window heating for use on agricultural machinery and commercial vehicles. Viewing angles in 78°, 130° and 150° diagonally. Extremely robust (highest protection class IP 69K). Dust, dirt, rain and frost resistant.

78° / 130° / 150° Viewing angle // Protection class IP 69K

#### Technical specifications

Resolution	960 × 480
Sensitivity	0 Lux (8 IR LED)
Lens / angle	78° / 130° / 150°
Operating voltage	12 - 24V DC
Temperature range	-30 °C ~ +70 °C
Casing	Aluminium
Protection class	IP 69K
Dimensions (W × H × D)	76 × 70 × 42 mm
Connections	MiniDIN screwable

### Camera RK 1306M

CM-2-130-11

Small 12 and 24V camera for hard-to-reach areas on the outside of the vehicle. Extremely robust construction (highest protection class IP 69K). Can be placed almost anywhere. 130° Viewing angle // Protection class IP 69K

#### Technical specifications

Resolution	960 × 480
Sensitivity	0 Lux (5 IR LED)
Lens / angle	130°
Operating voltage	12 - 24V DC
Temperature range	-30 °C ~ +70 °C
Casing	Aluminium
Protection class	IP 69K
Dimensions (W × H × D)	41 × 29 × 45,5 mm
Connections	MiniDIN screwable



### Camera RK 1304M

CM-1-185-01

Extremely robust construction. Can be placed almost anywhere.

180° Viewing angle // Protection class IP 69K

#### Technical specifications

Resolution	1280 × 960
Sensitivity	0.02 Lux (F1.4)
Lens / angle	180° diagonal
Operating voltage	12 - 24V DC
Temperature range	-30 °C ~ +85 °C
Casing	Aluminium
Protection class	IP 69K
Dimensions (W × H × D)	23 × 23 × 25 mm
Connections	MiniDIN screwable



### Camera RK 1310M

CM-1-170-01

Small dual camera with a near and far vision area for vehicles with trailers. Can be placed almost anywhere.

170° Viewing angle // Protection class IP 68

#### Technical specifications

Resolution	762 × 405
Sensitivity	0 Lux
Lens / angle	170°
Operating voltage	12V DC
Temperature range	-30 °C ~ +70 °C
Casing	Aluminium
Protection class	IP 68
Dimensions (W × H × D)	50 × 37 × 38 mm
Connections	MiniDIN screwable

On every  
vehicle  
tailored





**Dust, dirt,  
and rain-  
resistant**



### Camera RK 1100M

**PAL:** CM-1-130-08  
**NTSC:** CM-1-130-12

Reversing camera with electrical protective flap. Extremely robust (highest protection class IP 69K). Included in delivery: shutter box for flap control, 20 m connection cable.

145° Viewing angle // Protection class IP 69K

#### Technical specifications

Resolution	1020 × 507
Sensitivity	0 Lux
Lens / angle	145°
Operating voltage	12V DC
Temperature range	-40 °C ~ +70 °C
Casing	Stainless steel
Protection class	IP 69K
Dimensions (W × H × D)	88 × 65 × 53 mm
Connections	MiniDIN screwable



### Camera RK 1112M

**PAL:** CM-1-120-13  
**NTSC:** CM-1-120-12

Reversing camera with electrical protective flap. Extremely robust (highest protection class IP 69K). Included in delivery: Shutterbox for flap control.

120° Viewing angle // Protection class IP 69K

#### Technical specifications

Resolution	PAL: 530 TV Z/L NTSC: 480 TV Z/L
Sensitivity	0 Lux with IR LED on
Lens / angle	120°
Operating voltage	12V DC
Temperature range	-40 °C ~ +85 °C
Casing	Aluminium
Protection class	IP 69K
Dimensions (W × H × D)	103 × 43 × 70 mm
Connections	MiniDIN screwable



### Camera RK 1002M / 1004M

**Camera RK 1002M (110°)** CM-1-110-01  
**Camera RK 1004M (110°)** CM-1-110-04

Ball camera with extremely robust casing (highest protection class IP 69K). For hard-to-reach areas on the outside of the vehicle. Can be aligned on all sides.

110° Viewing angle // Protection class IP 69K

#### Technical specifications

Resolution	500 × 582
Sensitivity	0 Lux (8 IR LED)
Lens / angle	2.6 mm / 110°
Operating voltage	12V DC +/- 10%
Temperature range	-30 °C ~ +70 °C
Casing	Aluminium/plastic
Protection class	IP 69K
Dimensions (W × H × D)	
RK 1002M	63 × 76,5 × 50,5 mm
RK 1004M	84 × 97 × 79,2 mm
Connections	MiniDIN screwable



### Camera RK 1001M

CM-1-150-09

Ball camera with extremely robust casing. For hard-to-reach areas on the outside of the vehicle. Can be aligned on all sides.

150° Viewing angle // Protection class IP 68

#### Technical specifications

Resolution	500 × 582
Sensitivity	0 Lux (8 IR LED)
Lens / angle	150°
Operating voltage	12 V DC
Temperature range	-30 °C ~ +70 °C
Casing	plastic
Protection class	IP 68
Dimensions (W × H × D)	97 × 85 × 79 mm
Connections	MiniDIN screwable

### Camera RKT 1003M

**PAL:** CM-1-110-02  
**NTSC:** CM-1-110-06

Rear camera for vans and minibuses. Extremely robust design (highest protection class IP 69K).

110° Viewing angle // Protection class IP 69K

#### Technical specifications

Resolution	500 × 582
Sensitivity	0 Lux (8 IR LED)
Lens / angle	110°
Operating voltage	12 - 24V DC
Temperature range	-30 °C ~ +70 °C
Casing	Aluminium/plastic
Protection class	IP 69K
Dimensions (W × H × D)	132,5 × 57,4 × 207 mm
Connections	MiniDIN screwable







## Camera SK 1706M / SK 1708M / SK 1710M

Camera SK 1706M (150°)	CM-2-150-01
Camera SK 1708M (180°)	CM-2-180-01
Camera SK 1710M (78°)	CM-1-078-01

A wide-angle camera for good peripheral vision. Extremely robust design (highest protection class IP 69K). Even withstands car washes with the steam jet without any problems.

### Technical specifications

Resolution	960 × 480
Sensitivity	0 Lux (8 IR LED)
Lens / angle	150° / 180° / 78°
Operating voltage	12 - 24V DC
Temperature range	-30 °C ~ +70 °C
Casing	Aluminium
Protection class	IP 69K
Dimensions (W × H × D)	57 × 47.5 × 65.5 mm
Connections	MiniDIN screwable



## Adapter for SK 1706M / SK 1708M / SK 1710M

ZA-1-007-03

Adapter for anti-reflective coating and for use e.g. as a front camera.



## Camera RK 1902M

CM-1-160-01

License plate holder with integrated 160° camera. For concealed installation on the vehicle. Incl. 10 m Camera cable.

160° Viewing angle // Protection class IP 68

### Technical specifications

Resolution	512 × 582
Sensitivity	0,1 Lux
Lens / angle	160°
Operating voltage	12V DC +/- 10%
Temperature range	-30 °C ~ +60 °C
Casing	Plastic
Protection class	IP 68
Dimensions (W × H × D)	526 × 147 × 28 mm
Connections	MiniDIN pluggable



## Camera RK 1707M IR

CM-5-150-02

Reversing camera for vans and mobile homes with a Viewing angle of 170°. Night vision function through infrared LED. Adapts elegantly to any body.

170° Viewing angle // Protection class IP 67

### Technical specifications

Resolution	960 x 480
Sensitivity	0 Lux (6 IR LED)
Lens / angle	170°
Operating voltage	12 - 24V DC
Temperature range	-30 °C ~ +85 °C
Casing	Plastic
Protection class	IP 67
Dimensions (B × H)	30.8 × 34.7 mm
Connections	MiniDIN pluggable



# Clear

Edge circumspction  
with ROSHO-Cameras





## CABLE & ADAPTER

Always the best connection

### Cable & Adapter Accessories



#### Monitor extension cable for LCM 503T / 703T / 703QHD

MW-2-030-02

Extension cable 3 m



#### Extension cable MiniDIN

2 m	CW-2-020-02
5 m	CW-2-050-06
10 m	CW-2-100-04
15 m	CW-2-150-03
20 m	CW-2-200-03
slotted with corrugated pipe / 10 m	CW-2-100-14
slotted with corrugated pipe/ 15 m	CW-2-150-14

MiniDIN Plug screwable  
MiniDIN Socket screwable



#### Camera cable MiniDIN

2 m	CW-2-020-01
3 m	CW-2-030-05
5 m	CW-2-050-02
10 m	CW-2-100-03
15 m	CW-2-150-02
20 m	CW-2-200-01

MiniDIN Plug pluggable  
MiniDIN Socket screwable



#### Camera-/ Extension cable MiniDIN

5 m	CW-2-050-03
10 m	CW-2-100-10
20 m	CW-2-200-10

MiniDIN Plug pluggable  
MiniDIN Socket pluggable

#### Adapter cable 200mm

SW-2-002-01

MiniDIN Plug pluggable, MiniDIN Socket screwable



#### Adapter cable 300mm

ZA-6-900-08

MiniDIN Socket pluggable, MiniDIN Plug screwable



#### Protective caps MiniDIN

External thread	ZA-6-900-10
inner thread	ZA-6-900-11

MiniDIN external thread screwable, MiniDIN inner thread screwable



#### Adapter Cinch Plug pluggable / MiniDIN Socket pluggable

ZA-5-900-04

Adapter for connection to Cinch / Socket



#### Trailer detection box MiniDIN

ZA-7-900-42

The trailer detection box automatically switches to the trailer's camera when the trailer is in operation. After uncoupling the trailer, the box switches back to the camera signal of the towing vehicle.



#### Voltage converter 24/12V, 3-6 A / PV3S

ZA-7003-01

For converting the vehicle voltage from 24V to 12V.



#### Quad Control Box M1

ZA-1-002-01

Splitbox for connecting up to 4 cameras. Automatic switch-on via trigger signal. Incl. power supply and trigger connections.







### Spiral cable set VAR II - 1.5 m

For the connection of a camera **SZ-1-001-04**  
 For connecting two cameras **SZ-1-001-06**

Waterproof, three-part cable set for connecting a monitor in the towing vehicle and a camera on the trailer. 3 m spiral cable, 1.5 m camera connection cable and a 1.5 m monitor connection cable.



### ABS Direct connect VAR II - 1.5 m

1 × 1.5 m	<b>CW-2-015-06</b>
2 × 1.5 m	<b>CW-2-015-08</b>
3 × 1.5 m	<b>CW-2-015-09</b>

1.5 m direct connection cable for the ABS II series. With this cable you create a robust connection from the trailer to the towing vehicle.



### ABS Spiral cable VAR II

Default 3 m	<b>SW-4-030-01</b>
Special length 4.5 m	<b>SW-4-045-01</b>

ADR protected spiral cable in 3 m and 4.5 m working length.



### ABS Towing vehicle VAR II - 1.5 m

**MW-2-015-05**

Connection cable towing vehicle 1.5 m. Plug screwable.



### ABS Trailer VAR II - 1.5 m

**CW-2-015-04**

Connection cable trailer 1.5 m. Socket screwable.



### ABS Parking socket VAR II

**ZA-7-002-07**

For safe storage of the spiral cable or the direct connection.



### ABS Parking socket holder VAR II

**ZA-7-002-06**

Holding device for the ABS parking socket VAR II.



### ABS Towing vehicle VAR II - 2 × 1.5 m

**MW-2-015-07**

Connection cable towing vehicle with 2 × 1.5 m. Plug screwable.



### ABS Trailer VAR II - 2 × 1.5 m

**CW-2-015-05**

Connection cable trailer with 2 × 1.5 m. Socket screwable.



### ABS Towing vehicle VAR II - 3 × 1.5 m

**MW-2-015-10**

Connection cable towing vehicle with 3 × 1.5 m. Plug screwable.



### ABS Trailer VAR II - 3 × 1.5 m

**CW-2-015-07**

Connection cable trailer with 3 × 1.5 m. Socket screwable.

**With our Accessories you can be sure, that everything fits perfectly**







## The right adapter

for your Mercedes-Benz,  
MAN, VOLVO, SCANIA  
and IVECO Multimedia display



## Mercedes-Benz

### Truck Adapter 24V Actros, Atego, Arocs and Antos

SW-2-001-22 / SW-2-001-23

For showing camera images on the 12.7 cm instrument cluster (code J1C) or on the radio navigation system Bluetooth (code J2D) and (code J9J)

SW-2-001-19 (two camera inputs)

SW-2-001-26 (4 camera inputs)

For showing camera images on the multimedia cockpit J6B / J6C with code J9P



### Transporter Adapter Sprinter 906 with code FR7 (Audio 15) Sprinter 907 with code FV1 on inside mirror

SW-2-001-22 / SW-2-001-23






## MAN

### MMT-II Adapter MAN MMT II Radio Advanced

SW-2-000-12

For easy connection of a ROSHO camera to the MAN Media Truck Advanced 350 NP (MMT II) with pre-installation 351MA, 351MC, 351ME, 351MF.

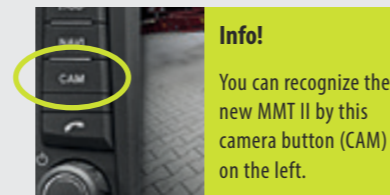

**Info!**

You can recognize the new MMT II by this camera button (CAM) on the left.

### MMT-III Adapter MAN MMT III Radio Advanced / Advanced Plus

SW-2-000-09

Attention: only with pre-installation Advanced Middle and Advanced High!

## VW-Crafter / MAN-TGE

### VW-Crafter: Camera preparation (PR-NR. KA8) MAN-TGE: Camera preparation (Code 632KM/KA8)

SW-2-000-15

## Fiat Ducato

SW-2-000-16

## DAF

### DAF TNR Adapter

ZA-4-900-48

For easy connection to the DAF TNR Truck Navigation Radio.

## SCANIA

### SCA Adapter SCANIA Radio Premium

SW-2-000-09

For easy connection of a ROSHO camera to the SCANIA Radio Premium.



## IVECO

### IVECO Truck Adapter für IVECONNECT

ZA-4-900-14

Adapter cable for connecting a ROSHO camera the IVECO IVECONNECT.



SW-2-000-17

Adapter cable for connecting a ROSHO camera the IVECO HI CONNECT.

## VOLVO

### SID Adapter VOLVO SID-DISPLAY

SW-2-000-14

For easy connection of a ROSHO camera to the VOLVO SID display.







## Imprint

ROSHO GmbH – Rose & Holiet  
Rotrehre 21  
31542 Bad Nenndorf

Phone: +49 (0) 5723 9417 - 0  
Fax: +49 (0) 5723 9417 – 50  
E-Mail: [info@roscho.de](mailto:info@roscho.de)

Managing Director: RA Holger Schimmels  
Shareholders: Hans Rose, Josef Holiet  
Register court: AG Stadthagen  
Registration number: HRB 1156

VAT number: DE 812 88 77 95



The information in this catalogue contains only general descriptions or performance characteristics which in case of actual use do not always apply as described or which may change due to further development of the products. This information is merely a technical description of the product. In particular, it does not constitute a guarantee of quality or durability. The desired performance characteristics are only binding if they are expressly agreed upon when the contract is concluded. We reserve the right to deliver, errors and technical changes.

ROSHO GmbH - Rose & Holiet | English | December 2020

**Printed in Germany**